



R-PM Series Phase Modulator



Description

The LiNbO₃ phase modulator is widely used in high-speed optical communication system, laser sensing and ROF systems because of well electro-optic effect. The R-PM series based on Ti-diffused and APE technology, has stable physical and chemical characteristics, which can meet requirement of the most applications in laboratory experiments and industrial systems.

Features

- Low insertion loss
- Polarization-maintaining
- Low half-wave voltage
- Dual-polarization option

Applications

- Optical communication
- Quantum key distribution
- Laser sensing systems
- Frequency shifting

Wavelength

- 780nm
- 850nm
- 1064nm
- 1310nm
- 1550nm

Bandwidth

- 300MHz
- 10GHz
- 20GHz
- 40GHz
-

Rof-PM Series	Rof-PM-07	Rof-PM-08	Rof-PM-10	Rof-PM-13	Rof-PM-15
Operating wavelength	780nm	850nm	1064nm	1310nm	1550nm
3dB Bandwidth	~10GHz	~10GHz	~10GHz	~10GHz	~10/20/40GHz
Insertion Loss	<3.5dB	<3.5dB	< 3.5dB	< 3.5dB	< 3.5dB
PER	> 20dB	> 20dB	> 20dB	> 20dB	> 20dB
V _π @RF (50KHz)	< 3V	< 3V	< 2.0V / <4.0V	< 3V	< 4V

Ordering Information

Rof	PM	15	10G	XX	XX
	Type: PM---Phase Modulator	Wavelength: 07---780nm 08---850nm 10---1060nm 13---1310nm 15---1550nm	Operating bandwidth: 300M---300MHz 10G---10GHz 20G---20GHz 40G---40GHz	In-Out Fiber type: PP---PM/PM PS---PM/SMF SS---SMF/SMF	Optical connector: FA---FC/APC FP---FC/PC SP---Customization

**R-PM-08-10G****Wavelength 850nm 10GHz Phase modulator**


Parameter	Symbol	Min	Typ	Max	Unit
Optical parameters					
Operating wavelength	λ	800	850	870	nm
Insertion loss	IL		2.5	3	dB
Optical return loss	ORL			-45	dB
Polarization extinction ratio	PER	20			dB
Optical fiber	Input port	780nm PM fiber(125/250 μ m)			
	output port	780nm PM fiber(125/250 μ m)			
Optical fiber interface		FC/PC、FC/APC Or Customization			
Electrical parameters					
Operating bandwidth (-3dB)	S_{21}	8	10		GHz
Half-wave voltage @50KHz	V_{Π}		2.5	3	V
Electrical return loss	S_{11}		-12	-10	dB
Input impedance	Z_{RF}	50			Ω
Electrical interface		K(f)			

Limit Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Input optical power@850nm	$P_{in,Max}$	dBm			13
Input RF power		dBm			33
Operating temperature	T_{op}	$^{\circ}$ C	-10		60
Storage temperature	T_{st}	$^{\circ}$ C	-40		85
Humidity	RH	%	5		90




S21 Curve

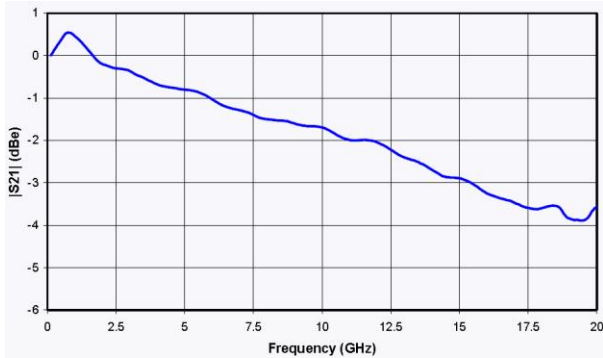


S21 Curve

&S11 Curve

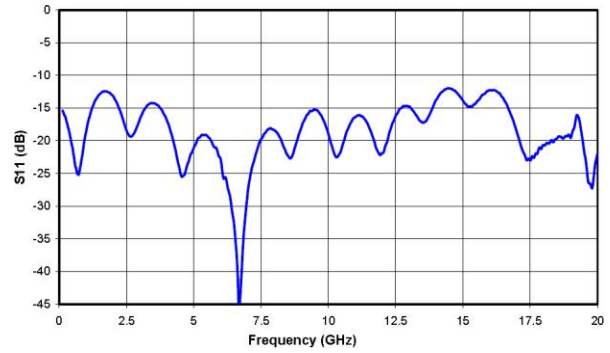

S11 Curve

Mechanical Diagram

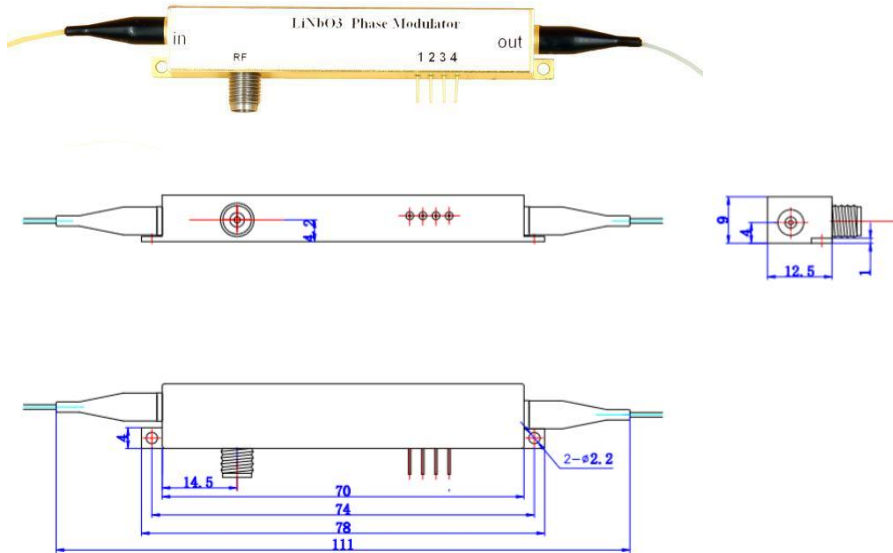

PORT	Symbol	Note
In	Optical input port	PM Fiber (125μm/250μm)
Out	Optical output port	PM and SMF option
RF	RF input port	SMA(f)
Bias	Bias control port	1,2,3,4-N/C

RF Driver and Bias control circuit board information are provided on website (www.bjrofec.com), you can also contact us for more information by email (bjrofec@rof-oc.com) or WhatsApp (+86-18978968297)